

## MAINTENANCE FREE SEALED LEAD-ACID BATTERY WITH SAFETY VALVE



- AGM type lead-acid battery
- Hermetic construction
- Does not emit gas during operation
- Reduced self-discharge current
- A system of valves to protect the battery from pressure increase
- Highly efficient lead-calcium electrode grids
- Maintenance-free and able to work in any position
- Suitable for UPS, telecommunications, power grids, medical equipment, emergency lighting and security systems.

Meets the standards IEC, JIS, BS, GB/T i YD/T.



ISO 9001


ISO 14001

ISO 45001

MH 28539

BSTXD210316008513EC

### Dimensions

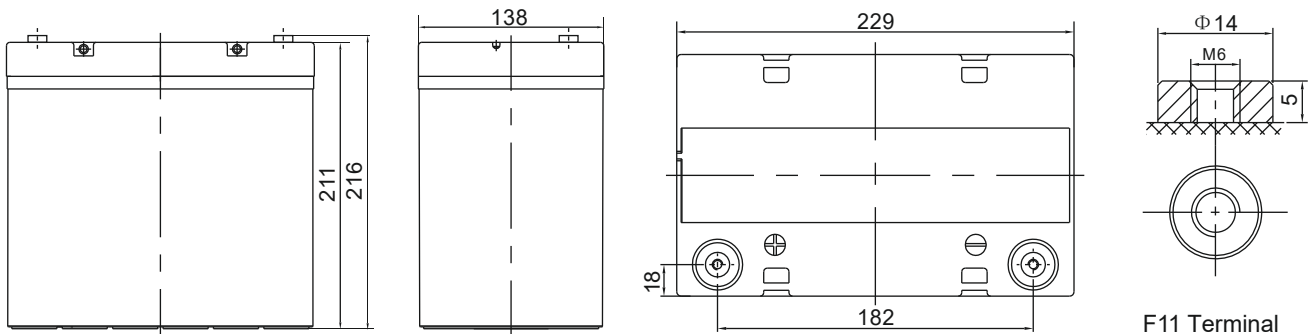

Length	229 ± 2 mm	Height	211 ± 2 mm	Terminal	Value
Width	138 ± 2 mm	Total Height	216 ± 2 mm	M6	8~10 Nm

Specifications	
Quantity of cells in the battery	6
Nominal voltage	12 V
Nominal capacity	55 Ah at 10-hour discharge up to 1.80 V per cell at 25°C
Weight	16,5 kg (tolerance ± 5.0%)
Internal resistance	≤ 6.0 mΩ (fully charged battery at 25°C)
Terminal type	F11 (M6)
Maximum discharge current	550A (5 c)
Short circuit current	1160 A
The maximum charging current	16,5 A
Capacity at different discharge modes	C3 41.4 Ah C5 46.8 Ah C10 55.0 Ah C20 58.2 Ah
Voltage in float mode	13.6 V~13.8 V at 25°C Temperature coefficient: -3 mV/°C/cell
Voltage in cyclic mode	14.6 V~14.8 V at 25°C Temperature coefficient: -4 mV/°C/cell
Operating temperature range Discharge	Discharge: -20°C ~ 60°C Charging: 0°C ~ 50°C Storage: -20°C ~ 60°C
Normal operating temperature range	25°C ± 5°C
Self-discharge	REAL-EL Valve Regulated Lead-Acid (VRLA) batteries can be stored for up to 6 months at 25°C, after which recharging is recommended. The monthly self-discharge rate is less than 3% at 25°C. Batteries must be charged before use.
Body material	A.B.S. UL94-HB


Constant Current Discharge Characteristics : A (25°C)												
*F.V/Time	5 min.	10 min.	15 min.	30 min.	1 hr.	2 hr.	3 hr.	4 hr.	5 hr.	8 hr.	10 hr.	20 hr.
1.60 V	176.2	134.2	102.0	60.2	33.6	20.0	15.5	12.2	10.4	6.97	5.80	3.04
1.65 V	169.8	126.8	97.5	57.8	32.5	19.4	15.0	11.9	10.1	6.90	5.73	2.99
1.70 V	161.5	116.8	91.3	55.3	31.4	18.7	14.6	11.5	9.84	6.79	5.65	2.95
1.75 V	150.9	106.9	85.0	52.8	30.2	18.1	14.2	11.2	9.60	6.69	5.57	2.91
1.80 V	137.5	96.8	78.5	50.5	29.1	17.4	13.8	10.9	9.35	6.58	5.50	2.89
1.85 V	121.0	79.1	65.1	43.5	26.1	16.0	12.7	10.2	8.72	6.18	5.18	2.74

Constant Power Discharge Characteristics: W/Cell (25°C)												
*F.V/Time	5 min.	10 min.	15 min.	30 min.	1 hr.	2 hr.	3 hr.	4 hr.	5 hr.	8 hr.	10 hr.	20 hr.
1.60 V	303.3	228.2	178.3	109.4	63.1	37.9	29.6	23.4	20.0	13.6	11.4	5.98
1.65 V	300.1	219.8	173.0	106.1	61.3	36.9	28.8	22.9	19.6	13.5	11.3	5.89
1.70 V	288.6	206.0	164.4	102.5	59.7	35.9	28.2	22.3	19.1	13.3	11.1	5.83
1.75 V	274.5	192.0	155.2	98.9	57.9	34.8	27.5	21.8	18.7	13.2	11.0	5.76
1.80 V	254.4	176.8	145.4	95.5	56.0	33.7	26.7	21.3	18.3	13.0	10.9	5.71
1.85 V	227.9	147.1	122.3	83.1	50.5	31.1	24.8	19.9	17.1	12.2	10.2	5.43


\*The final voltage of the element, V

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.  
The battery must be fully charged before the capacity test. The C<sub>10</sub> should reach 95% after the first cycle and 100% after the third cycle.


### Discharge Characteristics Curve

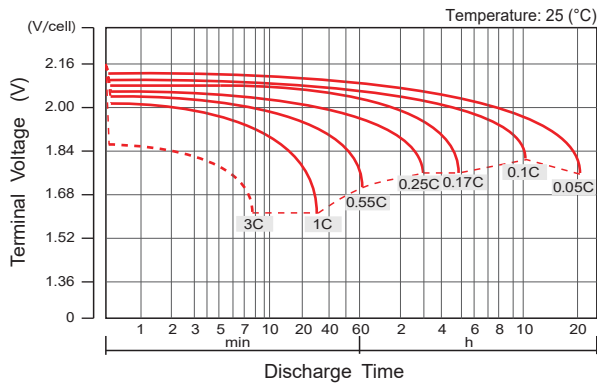


### Charge Characteristic Curve For Standby Use(IU)

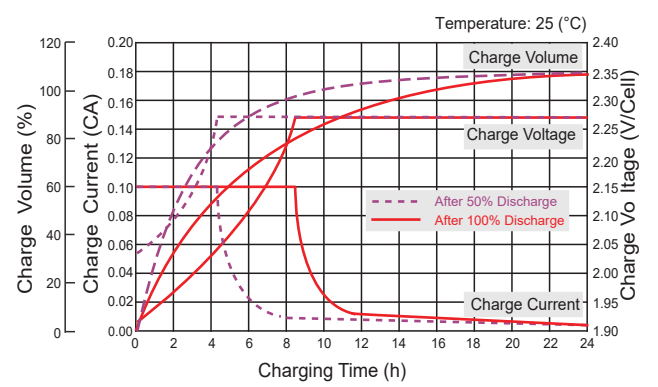


### Cycle Life In Relation To Depth Of Discharge

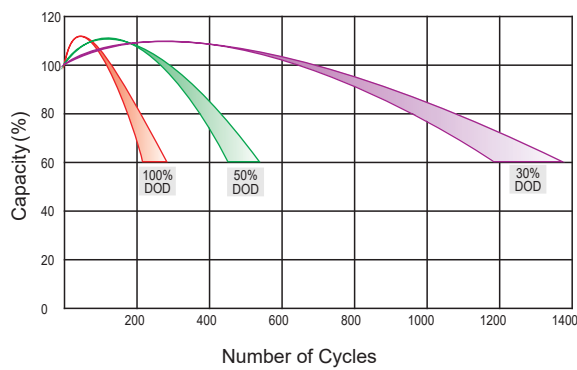


### Relationship Between Charging Voltage And Temperature

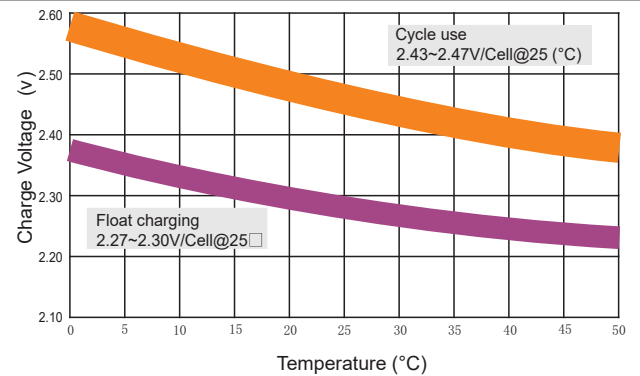


### Temperature Effects On Capacity

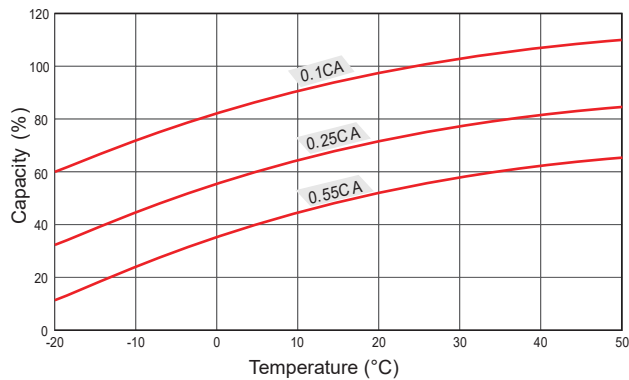

### Storage Characteristics

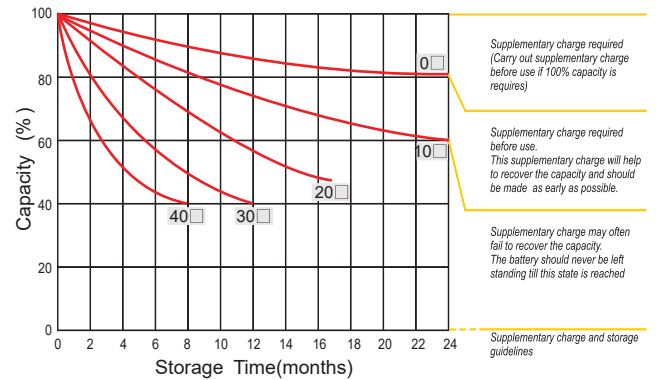

### Effect Of Temperature On Long Term Life

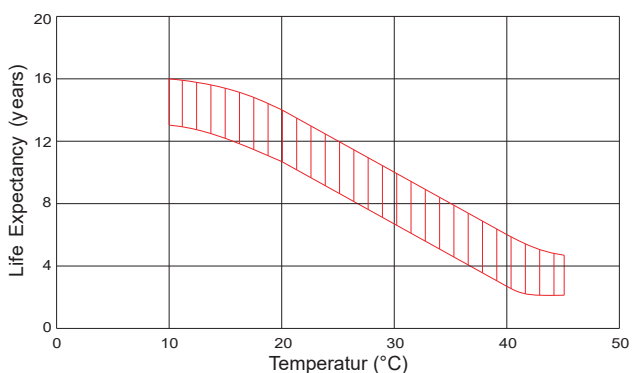

### Life Characteristics Of Standby Use

